

P1715



17" Intel Pentium M Panel PC with Resistive Touch Screen, Combo Drive and PCI Slot

Features

- Intel Pentium M High Performance & Low Power CPU
- 5 x High Speed USB 2.0 Ports (One on Front Panel)
- 4 x High Speed RS-232 Serial Ports
- 1 x PCI & Mini PCI Slot for Expansion
- Wireless LAN and 1.3M CMOS Camera Optional
- LCD Brightness Control
- Internal 2 x 2W Speakers
- Construction: Heavy-duty Steel + Aluminum Front Bezel

Specifications

System

CPU	Socket 478/479 Intel Pentium M Up to 1.8GHz
Cache	2nd Level depends on CPU
Memory	2 x 184-pin DDR SDRAM DIMM Up to 2GB
Chipset	Intel 852GM + ICH4
VRAM	Up to 32MB shared memory
ATA/IDE	UDMA 100 x 1 and UDMA 33 x 1
Watchdog Timer	255-level Reset
RTC	Support Real Time Clock
LAN	Intel 82562EZ 10/100 base-T

I/O

Serial Port	3 x RS-232 ports (COM1/3/4) 1 x RS-232/422/485 port (COM2)
Parallel Port	SPP/EPP/ECP mode
USB Port	5 x USB 2.0 compliant
KB/MS	1 x PS2 K/B and Mouse
LAN	1 x RJ-45
VGA	1 x DB15
Audio	Internal 2 x 2W Speaker and 1 x Mic-in/Line-out
Expansion Bus	1 x Mini PCI and PCI slot
Optional	Wireless LAN, 1.3M CMOS camera, 4CH Video input

LCD Display

Size/Type	17" TFT Color
Max. Resolution	1280 x 1024
Pixel Pitch	0.264 x 0.264 mm
Max. Colors	16.2M
Luminance	420 cd/m ² (Type. Center 1 point)

Touch Screen

Type	Analog Resistive	Capacitive (optional)
Resolution	Continuous	1024 x 1024
Light Transmission	80%	85%
Controller Interface	USB Interface	

Storage

HDD/Type	1 x 3.5" HDD bay
Combo Drive	1 x Slim Type 8X DVD-ROM or above
CD-ROM Drive	1 x Slim Type 24X CD-ROM or above (optional)


Power Supply

Input Voltage	AC 90 ~ 260V @ 50 ~ 60Hz
Output Rating	100W (Max.), +5V@7A, +12V@8

Mechanical & Environmental

Operating Temp.	0 ~ 50°C (32 ~ 122°F)
Storage Humidity	5 ~ 95% (non-condensing)
Vibration	17 ~ 500Hz, 1G PTP
Shock	10G/peak (11m sec)
Weight	10kg (22 lb)
Dimension (WxDxH)	483.5 x 106.5 x 378 mm (19" x 4.19" x 14.89")

Dimensions

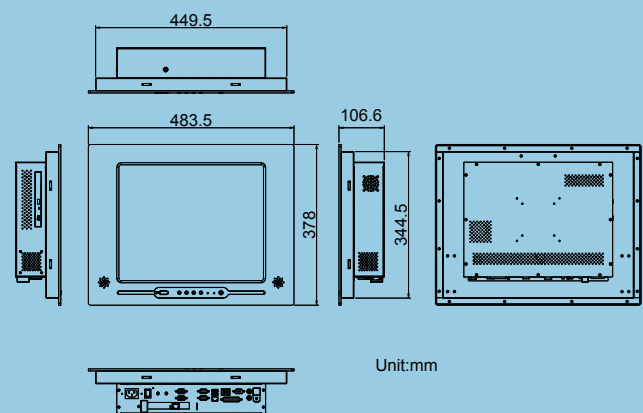

Ordering Information

P1715-2200-A/PM	17" Intel Pentium M Panel PC with Resistive Touch Screen, Combo Drive and PCI Slot
ARM-160	LCD monitor versatile arm (VESA)
ARM-174	LCD monitor wallmount bracket (VESA)

All specifications are subject to change without notice.