


# ITX M61X62A

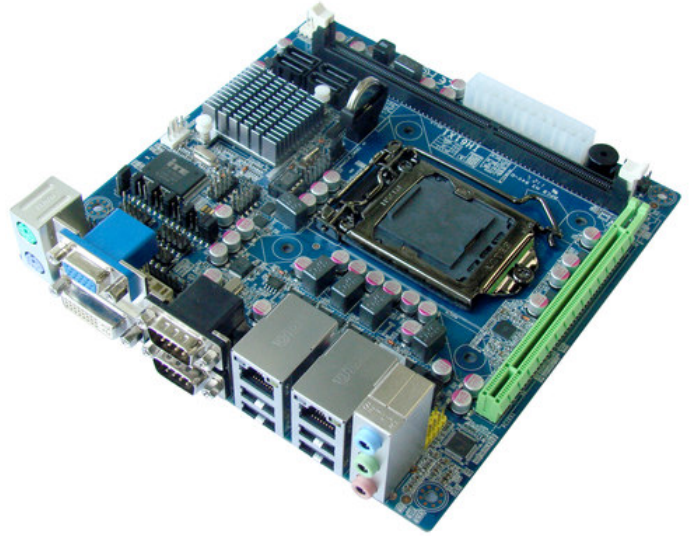

## Specification

CPU	Support Intel I3, I5, I7 processors
Chipset	Intel H61
Memory	1 x DDR3 sockets, support 1333/1066mhz up to 4 GB
Graphics	Depend on PCU
Audio	Onboard Realtek ALC887 HD audio chip
LAN	Onboard Realtek 8111E, dual 1000M LAN, support PXE.
Storage Interface	4 x SATA 3 Gb/s Hard disk connector
Expansion Slots	1 x PCIE 16X Expansion slot
USB	Support 8 PCS USB 2.0 Port (4 pcs need extend)
Internal I/O Connectors	<ul style="list-style-type: none"> <li>1 x 24-pin ATX main power supply</li> <li>1 x 4-pin power supply header</li> <li>4 x SATA headers</li> <li>1 x CPU fan header</li> <li>1 x System fan header</li> <li>1 x front panel header</li> <li>1 x Audio header</li> <li>2 x USB 2.0 headers</li> <li>1 x Clear CMOS Header</li> <li>4 x COM headers</li> <li>1 x CD_IN Audio header</li> <li>1 x IR Red-way extend header</li> <li>1 x 12Pin VGA_H header</li> <li>1 x GPIO header</li> <li>1 x J_SPDIF header</li> <li>1 x DEBUG_CON header</li> </ul>
Back Panel Connectors	<ul style="list-style-type: none"> <li>1 x PS/2 mouse and keyboard ports</li> <li>1 x VGA port</li> <li>1 x DVI port</li> <li>2 x COM ports</li> <li>4 x USB 2.0 port</li> <li>2 x RJ-45 ports</li> <li>1 x audio 3 Jacks( Line_in, Line_out and MIC)</li> </ul>
I/O Controller	1 x IT8782F
BIOS	AMI Authorized 8Mbit BIOS process, support RPL/PXE
Form Factor	Mini-ITX 170 x 170mm

## Work Environmental

Working conditional temperature	-15~55℃
Working conditional humidity	10%~80% relative humidity, non-condensing
Resolution	POS,ATM, Kiosk, Digital Signage and Living Room PC